

10/31/00

11-02-00

A

HEWLETT-PACKARD COMPANY

Intellectual Property Administration

P.O. Box 272400

Fort Collins, Colorado 80527-2400

PATENT APPLICATION

ATTORNEY DOCKET NO. 10002064-1

IN THE U.S. PATENT AND TRADEMARK OFFICE
Patent Application Transmittal Letter

COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): (X) Utility () Design

(X) original patent application,

() continuation-in-part application

Jc918 U.S. PTO
09/703323
10/31/00

INVENTOR(S): Charles E. Schinner

TITLE: ILLUMINATED DISPLAY AND METHOD OF USING SAME

Enclosed are:

- (X) The Declaration and Power of Attorney. (X) signed () unsigned or partially signed
(X) 6 sheets of drawings (one set) () Associate Power of Attorney
() Form PTO-1449 () Information Disclosure Statement and Form PTO-1449
() Priority document(s) () (Other) (fee \$)

CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY				
(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) TOTALS
TOTAL CLAIMS	13 — 20	0	X \$18	\$ 0
INDEPENDENT CLAIMS	3 — 3	0	X \$80	\$ 0
ANY MULTIPLE DEPENDENT CLAIMS	0		\$270	\$ 0
BASIC FEE Design (\$320.00); Utility (\$710.00)				\$ 710
TOTAL FILING FEE				\$ 710
OTHER FEES				\$
TOTAL CHARGES TO DEPOSIT ACCOUNT				\$ 710

Charge \$ 710 to Deposit Account 08-2025. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 08-2025 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 08-2025 under 37 CFR 1.16, 1.17, 1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EL 187987375 US

Date of Deposit October 31, 2000

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Commissioner for Patents, Washington, D.C. 20231.

By

Rick de la Torre

Typed Name: Rick de la Torre

Respectfully submitted,

Charles E. Schinner

By

Jerry R. Potts

Attorney/Agent for Applicant(s)

Reg. No. 27,091

Date: 10-27-00

Telephone No.: (858) 655-5973

PATENT
Attorney Docket No.: 10002064-1

ILLUMINATED DISPLAY AND METHOD OF USING SAME

Charles E. Schinner
San Diego, California
USA

EL187987375US

DOCKET # 10002064-1

ILLUMINATED DISPLAY AND METHOD OF USING SAME

5

TECHNICAL FIELD

The present invention relates to a illuminated display unit and method of using the display and more particularly relates to a method of using a liquid crystal display unit in a digital camera under a variety of photographic lighting conditions.

10

BACKGROUND ART

In modern day digital cameras, the viewing of the scene that will be captured is accomplished with either an optical viewfinder or a liquid crystal display (LCD) unit either alone or in combination with an optical viewfinder. In most, if not in all digital cameras, the intensity level or brightness level of the LCD is manually adjustable to accommodate for standard photographic lighting conditions. That is a middle of the road approach is taken to accommodate for both indoor and outdoor lighting conditions.

09/02/2006 15:23:10
"SECRET"

20

Besides the viewing of a scene with the LCD, the LCD also accomplishes two other primary purposes by displaying menu selections for enabling the user to control or set up camera operating conditions, and to display camera status information whenever a user is ready to capture an object image or has in fact captured an object image. While the LCD is able to perform these various function in general lighting conditions, all too often due to overly bright or dim ambient light conditions, the image displayed on the LCD is either too bright or too dim thereby greatly hindering a user in properly operating the camera.

25

One attempt at solving this problem has been to provide an over-riding manual adjustment to control the backlighting of the LCD. While this approach is satisfactory in some lighting conditions, the solution has not been entirely satisfactory. In this regard, the control selection for over-riding the default backlighting condition is generally found in a buried camera menu item that must be display on the LCD. Since the menu selection item must be displayed to be selected, often times it is difficult or entirely impossible to display the menu

30

item so that it may be clearly viewed by a user due to the ambient lighting conditions.

5 Therefore it would be highly desirable to have a new and improved digital camera that includes an LCD that operates in a variety of photographic lighting conditions ranging from poorly illuminated indoor settings to brightly illuminated outdoor settings.

SUMMARY OF THE INVENTION

10 A digital camera includes a LCD that has a back light level that is set at a point midway between a maximum intensity setting and a minimum intensity setting. The back light level is then adjusted automatically from this default setting to a brightness level that corresponds to a measured scene level. The back light intensity level then and contrast level are changed automatically thereafter to correspond to the measured scene level.

BRIEF DESCRIPTION OF THE DRAWINGS

15 The above mentioned features of the present invention and the manner of attaining them will become apparent and the invention itself will be best understood by reference to the following description of the preferred embodiment of the invention, in conjunction with the accompanying drawings, wherein:

20

FIG. 1 is a block diagrammatic representation of the digital camera of FIG. 1;

25 FIG. 2 is a pictorial view of a digital camera which is constructed in accordance with the preferred embodiment of the present invention;

FIG. 3 is high level flowchart of a control algorithm utilized to help set the brightness level setting of the LCD forming part of the digital camera of FIG. 1; and

30 FIG. 4 is a high level flowchart of a determination algorithm to calculate the brightness level of the LCD forming part of the digital camera of FIG. 1.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the drawings and more particularly to FIGS. 1-2 thereof there is
5 shown a digital camera 10 which is constructed in accordance with the present invention. The digital camera 10 is a portable device that operates in a variety of lighting conditions ranging from poorly illuminated indoors lighting situations to brightly illuminated outdoors lighting situations.

10 Considering the camera 10 in greater detail with reference to FIGS. 1-2, the camera 10 generally includes a housing 16 having mounted therein a lens system or arrangement 13 that helps facilitate directing the light reflecting from an object to be captured to the photosensitive plane of the camera 10. In order to help a user frame the object to be captured, the camera 10 also includes an optical viewfinder 14 having a dichroic mirror 43 and a status indicator 44 that
15 enables a user to visualize a through the lens scene while simultaneously viewing status information regarding the camera 10..

In order to help limit the amount of light that is communicated to the photosensitive plane of the camera, the camera 10 further includes an aperture 18 that is automatically
20 adjusted by a microprocessor 25 via a stepper motor 29. In this regard, the stepper motor 29 is coupled electrically to the microprocessor 25 and coupled mechanically to the aperture 18 in order to facilitate receiving the proper amount of light to assure proper image formation.

As best seen in FIG. 1, a shutter 19 is sandwiched between the aperture 18 and the
25 photosensitive plane of a charged couple device (CCD) 15 that converts light into an electrical signal that is indicative of the object framed within the optical viewfinder 14. The shutter 19 is also coupled to the stepper motor 29 to further facilitate controlling the amount of light that is allowed to fall on the CCD 15 for light converting purposes. To help control the strength of the electrical signal passing from the CCD 15 to the microprocessor 25, the camera 10 further
30 includes a gain control device, such as an variable gain operational amplifier 47, whose output is connected to an analog to digital converter 48. The analog to digital converter 48 converts

the analog signal passing from the output of the gain control device 47 into a digital signal of an acceptable level for processing by the microprocessor 25. A digital to analog converter 58 is coupled electrically between the microprocessor 25 and the gain control 47 to enable the microprocessor 25 to control the strength of the output signal that will be converted by the analog to digital converter 48. As will be explained hereinafter in greater detail, the microprocessor 25 operates under a set of control programs that are stored in an internal memory device, such as random access memory (RAM) module 84.

The digital camera 10 further includes a memory controller 52 that operates under the control of the microprocessor 25 for facilitating the permanent storage of each object image captured by the camera 10. In this regard, the memory controller 52 is adapted to receive a removable memory card 56 that functions to store the object images captured by the camera 10.

In order to enable the user to visualize images in either a live view mode of operation or in a review mode of operation (relative to images previously stored on the removable memory card 56), the digital camera 10 also includes a display unit, such as a liquid crystal display (LCD) unit 38. The LCD 38 is coupled to the microprocessor 25 via an internal bus 26 which also allows for buffering of images to the LCD 38 from a set of internal buffer registers forming part of the microprocessor 25. The LCD 38 has a backlight 39 that is controlled by an LCD brightness/contrast control program 300 that will be described hereinafter in greater detail. For the moment it will suffice to indicate that the backlight level of the LCD 38 is controlled to correspond to a measure ambient light level that is determined during the auto-exposure sequencing of the camera 10.

The digital camera 10 further includes a user interface 17 having a set of control switches that includes a power on/off switch 26, a mode selection switch 28, a zoom in switch 30, a zoom out switch 32 a live view switch 34 and a shutter actuation switch 36. The function of each of the switches will be described hereinafter in greater detail where relative.

Considering now the LCD brightness/contrast control program 300 in greater detail with reference to FIG. 3, the control program 300 begins whenever the user actuates the power switch 26. In this regard, the control program begins at a start command 302 and proceeds to a command step 304 that sets a POWER_{OFF} flag equal to a logical zero.

From the command step 302, the program advances to a command step 306 that sets the LCD_{CONTRAST} to a default contrast level DEFAULT_{CONTRAST}. Next the program proceeds to a command step 308 that sets the LCD_{BRIGHT} to a default brightness level DEFAULT_{BRIGHT}. From the foregoing it should be understood by those skilled in the art, that the brightness level and the contrast level of the LCD 38 are set to default levels which are located between maximum and minimum levels.

After the command step 308 is executed, the program goes to a decision step 310 to determine whether the user has placed the camera 10 in the capture mode of operation using the mode selection switch 28. If this condition is true, the program goes to a command step 350 (FIG. 3B) that will be described hereinafter in greater detail. If this condition is not true, the program advances to a decision step 312 to determine whether the user has placed the camera 10 in a review mode of operation utilizing the mode selection switch 28.

If a determination is made at decision step 312 that the camera 10 is operating in a review mode of operation, the program proceeds to a decision step 323 (FIG. 3C) that will be described hereinafter in greater detail. Otherwise, the program advances to a decision step 314 to determine whether the user has placed the camera in a connect mode of operation using the mode selection switch 28. If the user has not actuated the mode selection switch 28 to place the camera 10 in the connect mode of operation, the program proceeds to a decision step 318 to determine whether the user has actuated the power switch 26 to power down the camera 10.

If the user has actuated the power switch 26, the program goes to an exit command
 5 step 321 and exits the subroutine 300. If the user has not actuated the power switch 26, the
 program proceeds to a decision step 319 to determine whether the internal time out period of
 the camera 10 has elapsed. If the time out period has elapsed, the program goes to the exit
 command 321 and proceeds as described previously. Otherwise, the program advances to the
 decision step 310 and continues as described previously.

10 Considering again the decision step 314, if the user has placed the camera 10 in the
 connect mode of operation, the program advances to a command step 311 that causes the
 LCD contrast level to be set equal to the default contrast level. Next the program continues to
 a command step 313 that causes the LCD brightness level to be set to the default brightness
 level.

The program then advances to a command step 315 that sets up the brightness level to use the
 LCD setting when displaying messages on the LCD 38.

20 From the command step 315 the program proceeds to a determination step 316 to
 determine whether the camera 10 is busy. If the camera 10 is not busy, the program goes to a
 command step 317 that will be described hereinafter in greater detail. Otherwise, if the camera
 10 is busy, the program returns to step 315 and proceeds as described previously.

25 From the foregoing, it should be understood that the default setting for the LCD are
 activated at the command step 315 for displaying messages on the LCD 38. The program then
 proceeds from the command step 315 to to a command step 317 that causes the POWER_{OFF}
 flag to be set to a logical zero. After setting the POWER_{OFF} flag, the program continues to the
 decision step 318 and proceeds as described previously.

30 Considering now the command step 350 in greater detail with reference to FIG. 3B,
 the command step 350 set a back light on value (LV_{ON}) to a logical zero, live view is off, a

loop maximum flag to a logical zero, and a loop flag to a logical zero. LV_{ON} indicates the status of the live view mode where $LV_{ON} = 1$ is active and $LV_{ON} = 0$ is inactive. The term

5 $LOOP_{MAX}$ means skip n number of frames in the live view mode before recalculating the display settings. In this regard, the typical frame rate in the live view mode is about 30 frames per second. Therefore $LOOP_{MAX}$ would be selected to be 15 frames so the brightness and contrast would be adjusted twice per second. More specifically it is not necessary to update the display settings in the live view mode in each frame as the scene brightness does not

10 change that rapidly.

After execution of command step 350, the program proceeds to a call command step 352 that causes an auto-exposure subroutine to be executed, such as the auto exposure subroutine described in U.S. patent application Serial No. _____. After the auto-exposure subroutine is executed, the program returns to the step, a decision step 354 to determine whether the user has utilized the mode selection switch 28 to place the camera 10 in other than the capture mode of operation. If this condition is true, the camera advances to a command step 355 that causes the LCD unit 38 to turn off in order to conserve camera power. After executing command step 355 the camera goes to decision step 318 and proceeds as

15 described previously.

20

If at decision step 354 a determination is made that the camera 10 is still operating in the capture mode of operation, the program advances to a decision step 356 to determine whether the user has activated the live view mode switch 34. If a determination is made that

25 the user has activated the liveview switch 34, the program goes to a decision step 358 that will be described hereinafter in greater detail. Otherwise the camera goes to a decision step 357 to determine whether if live view is currently on. If LV_{ON} has been set to logical one level, the program proceeds to a command step 362 that will be described hereinafter in greater detail. Otherwise, the program goes to a call step 365 that causes the auto-exposure subroutine to be

30 called.

After the auto-exposure subroutine has been executed the program returns and EV value and continues to a decision step 367 to determine whether the user has actuated the shutter switch 36. If the shutter switch 36 has not been actuated, the program returns to the decision step 354 (FIG. 3B) and proceeds as described previously. If the shutter switch 36 has been actuated, the program advances to a command step 368 that turns power off of the LCD 38 in order to preserve camera power. Once command step 368 is executed the program proceeds to a command step 370 that causes the CCD 15 to capture the object image framed by the viewfinder 14.

Once the object image has been captured, the program goes to a process command step 372 that causes the microprocessor 25 to process the captured image for storage purposes. Next the program goes to a store command step 374 that causes the processed image to be stored on the removable memory device 56. After the image is stored, the program advances to a command step 376 that causes the POWER_{OFF} flag to be set to a logical one level. It should be understood by those skilled in the art that after an image is captured and then reviewed there is no immediate need to change the display settings. On the other hand, if the user is reviewing stored images while POWER_{OFF} = 0 then base the display settings on the image settings when the image was originally captured. The program then returns to the decision step 354 and proceeds as described previously.

Considering now the decision step 358 in greater detail with reference to FIG. 3B, if LV_{ON} is not set to a logical one, the program proceeds to a command step 359 that cause the LCD display unit to be activated. It should be understood that at step 358 since the liveview (LV) switch has been activated, LV will switch to the opposite state (off if on, on if off). Next the program proceeds to a command step 360 that set LV_{ON} to a logical one. The program then proceeds to command step 362 that will be described hereinafter in greater detail. If at step 358 LV_{ON} is set to a logical one, the program goes to a command step 363 that causes

LV_{ON} to be reset to a logical zero. From command step 363 the program goes the call step 365 and proceeds as described previously.

5

Considering now the command step 362 in greater detail with reference to FIG. 3B, the command step 362 causes the loop counter LOOP to be incremented by one. That is LOOP is set equal to LOOP + 1. Next, the program continues to a decision step 364 to determine whether the LOOP counter is less than a maximum loop value LOOP_{MAX}. If this condition is not true, the program advances to a command step 384 (FIG. 3B) that will be described hereinafter in greater detail. If the condition is true, the program proceeds a command step 366 that set LOOP equal to a logical zero. Next the program advances to a call command 371 that causes a LCD setting subroutine 400 to be executed as will be described hereinafter in greater detail. After the subroutine 400 is executed the program returns and continues to a command step 373 that set the contrast level of the LCD 38 equal to a current LCD_{CONTRAST} level and sets the LCD_{BRIGHT} level to the current brightness level. The program then advances to a command step 384 (FIG. 3B) that will be described hereinafter in greater detail.

10

15

20

Considering now the command step 384 in greater detail with reference to FIG. 3B, the command step 384 causes a live view image to be captured. The captured live view image is then processed or subsampled at a command step 386. Next, the program advances to a command step 388 that causes the captured and processed live view image to be displayed on the LCD 38. The program then goes to call command 365 and proceeds as described previously.

25

Considering now the decision step 323 as advanced to from decision step 312 in greater detail with reference to FIG. 3C, the decision step 323 determines whether the POWER_{OFF} flag has been set to a logical one. If this condition is not true, the program goes to a command step 325 that causes the microprocessor 25 to access a file header and then retrieve from the file the EV value. Once the command step 325 has been executed the

30

program goes to a call command 327 that calls the LCD setting subroutine 400 that will be described hereinafter in greater detail. After the subroutine 400 is executed, the program returns and continues to a command step 329 that will be described hereinafter in greater detail.

If a determination is made at decision step 323 that the $POWER_{OFF}$ flag is set to a logical one(indicating that power was not turned off between capturing an image and review the image), the program advances to the command step 329. Command step 329 sets the LCD brightness and contrast levels to LCD_{BRIGHT} and $LCD_{CONTRAST}$ respectively. Next, the program goes to a command step 331 that set the illumination level of the status indicator 44 to its default level. From step 331 the program proceeds to a command step 332 that causes the status indicator 44 to blink to provide and indication to the user that the camera 10 is busy processing an image.

Next the program goes to a command step 333 that causes the microprocessor 25 to retrieve an image file and decompress the image for display purposes. In this regard, after the image has been decompressed the program goes to a command step 335 that causes the decompressed image to be displayed on the LCD 38. The program then returns to step 318 (FIG. 3A) and proceeds as described previously.

Considering now the LCD setting subroutine 400 in greater detail with reference to FIG.4, the subroutine is executed in response to the call commands at steps 327 (FIG. 3C) or 371 (FIG. 3B) respectively. After the subroutine 400 is executed the program returns to the next step following the call command that caused the subroutine 400 to commence. In any event, the subroutine 400 begins at a start command 401 and proceeds to a command step 402 that causes EV_{LCD} to be set to EV. Next the program advances to a decision step 404 to determine whether EV is greater than EV_{MAX} . If this condition is determined, the program proceeds to a command step 414 that sets EV_{LCD} to EV_{MAX} . The program then goes to a command step 408 that will be described hereinafter in greater detail.

If a determination is made at decision step 404 that EV is not greater than EV_{MAX} , the program proceeds to a decision step 406 to determine whether EV is less than EV_{MIN} . If this condition is determined, the program goes to a command step 416 that causes EV_{LCD} to be set to EV_{MIN} . After setting the EV value to the minimum value the program proceeds to the command step 408. If a determination is made at decision step 408 that EV is not less than the EV_{MIN} then the program goes directly to the command step 408.

Considering now the command step 408 in greater detail, the command step 408 causes the $LCD_{CONTRAST}$ to be set to a default value or $DEFAULT_{CONTRAST}$. Next the program goes to a command step 410 that sets the LCD_{BRIGHT} level equal to $(16 * EV_{LCD} - 32)$ in order to map EV into a digital word representing the LCD_{BRIGHT} . The program then goes to a decision step 412 to determine whether LCD_{BRIGHT} is equal to or greater the maximum brightness level or $BRIGHT_{MAX}$.

If a determination is made at step 412 that LCD_{BRIGHT} is greater than or equal to the maximum brightness level the program advances to a command step 418 that set $LCD_{CONTRAST}$ equal to $(16 * EV_{LCD} - 32)$. This value is selected since the LCD backlight brightness level is at maximum and the only way to increase apparent display brightness is to decrease the display contrast; i.e. the more washed out colors displayed appear brighter on the LCD 38. The program then goes to a return command 420 that returns the program to the subroutine 300 as mentioned earlier.

While particular embodiments of the present invention have been disclosed, it is to be understood that various different modifications are possible and are contemplated within the true spirit and scope of the appended claims. There is no intention, therefore, of limitations to the exact abstract or disclosure herein presented.

I claim:

- 5 1. An illuminated display system, comprising:
an illuminated display unit for displaying information;
a control algorithm for measuring ambient light reflecting from an object in proximity
to said display unit; and
another control algorithm responsive to said control algorithm for adjusting a display
10 illuminator to a determined intensity level for facilitating viewing of the information displayed
on said display unit.
2. An illuminated display system according to claim 1, further comprising:
a brightness algorithm for determining when said display illuminator is illuminating said
display unit at a maximum intensity level; and
a contrast algorithm responsive to said brightness algorithm for automatically adjusting
a contrast level of said display unit to a predetermined level when said display illuminator level
is at said maximum level to further facilitate viewing of information displayed on said display
unit.
- 20 3. An illuminated display system according to claim 2, wherein said display unit is a
liquid crystal display unit.
4. An illuminated display system according to claim 3, wherein said display illuminator
25 is a back light display illuminator.
5. An illuminated display system according to claim 3, wherein said display illuminator
is a front light display illuminator.
- 30 6. A digital camera, comprising:
an image processing system for capturing, processing and storing images;

a liquid crystal display unit for displaying images;

a control algorithm for measuring ambient light reflecting from an object in proximity
5 to said liquid crystal display unit; and

another control algorithm responsive to said control algorithm for adjusting a back
light level of said liquid crystal display unit to a determined ambient light level for facilitating
viewing of images displayed on said liquid crystal display.

10 7. A digital camera according to claim 6, further comprising:

a brightness algorithm for determining when said back light level is at a maximum level;
and

a contrast algorithm responsive to said brightness algorithm for automatically adjusting
a contrast level of said liquid crystal display to a predetermined level when said back light level
is at said maximum level to further facilitate viewing of image and textual information
15 displayed on said liquid crystal display.

20 8. A digital camera according to claim 7, wherein said brightness algorithm determines
a default brightness midway between a maximum brightness level and a minimum brightness
level.

25 9. A digital camera according to claim 8, wherein said contrast algorithm adjusts said
contrast level to default contrast level corresponding to said default brightness whenever said
liquid crystal display unit is displaying camera status information and not an object image.

10. A digital camera according to claim 9, wherein said contrast algorithm adjusts said
contrast level to an adjusted contrast level whenever said brightness algorithm determines that
said back light level is at a maximum level.

30 11. A digital camera according to claim 10, wherein said adjusted contrast level is a
maximum contrast level.

13. A method of illuminating a display unit according to claim 12, further comprising:
adjusting display contrast when said display illuminator is adjusted to a maximum
intensity level.

ILLUMINATED DISPLAY AND METHOD OF USING SAME

ABSTRACT

A digital camera includes a LCD that has a back light whose intensity level is set at a point midway between a maximum intensity setting and a minimum intensity setting. The back light level is then adjusted automatically from this default setting to a brightness level that corresponds to a measured scene level. The back light intensity level and contrast level of the LCD then change automatically thereafter to correspond to the measured scene level whereby the LCD controls are adjusted according to the lighting environment.

10002064-1 "E2E02600"

FIG. 1

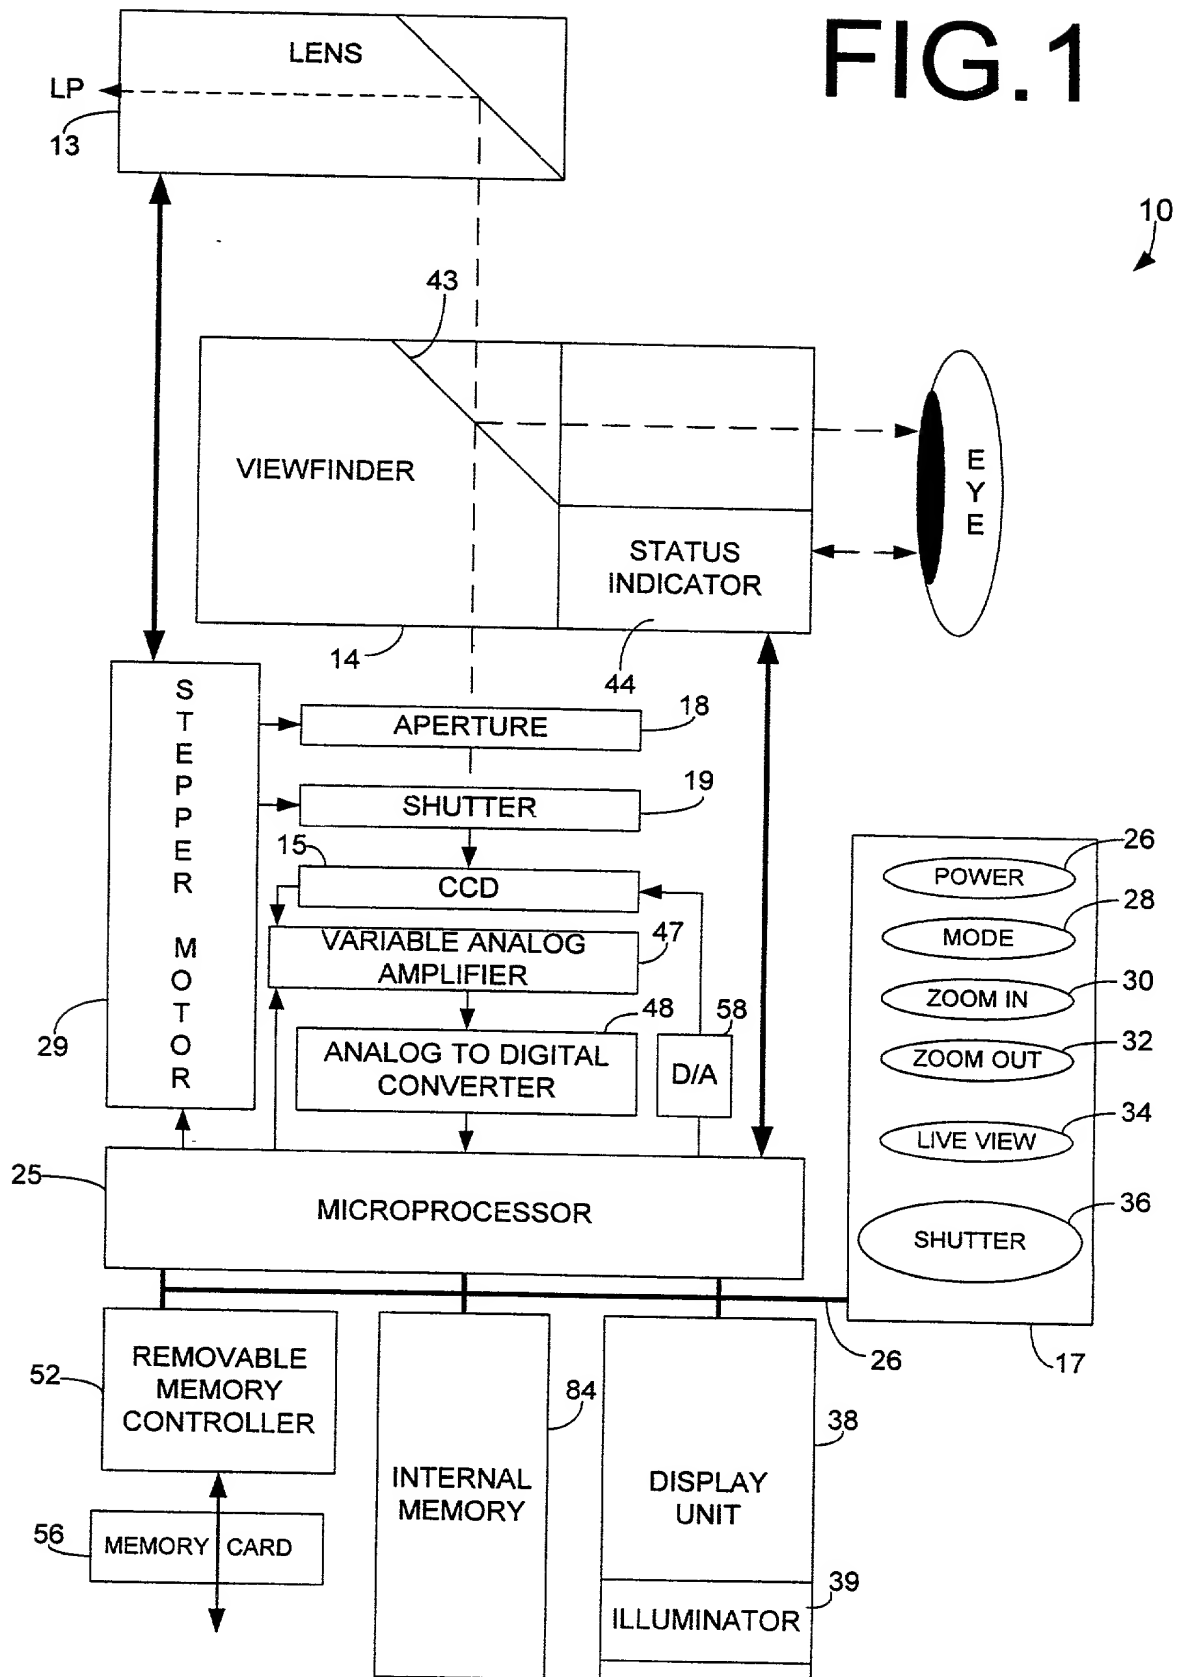


FIG.2

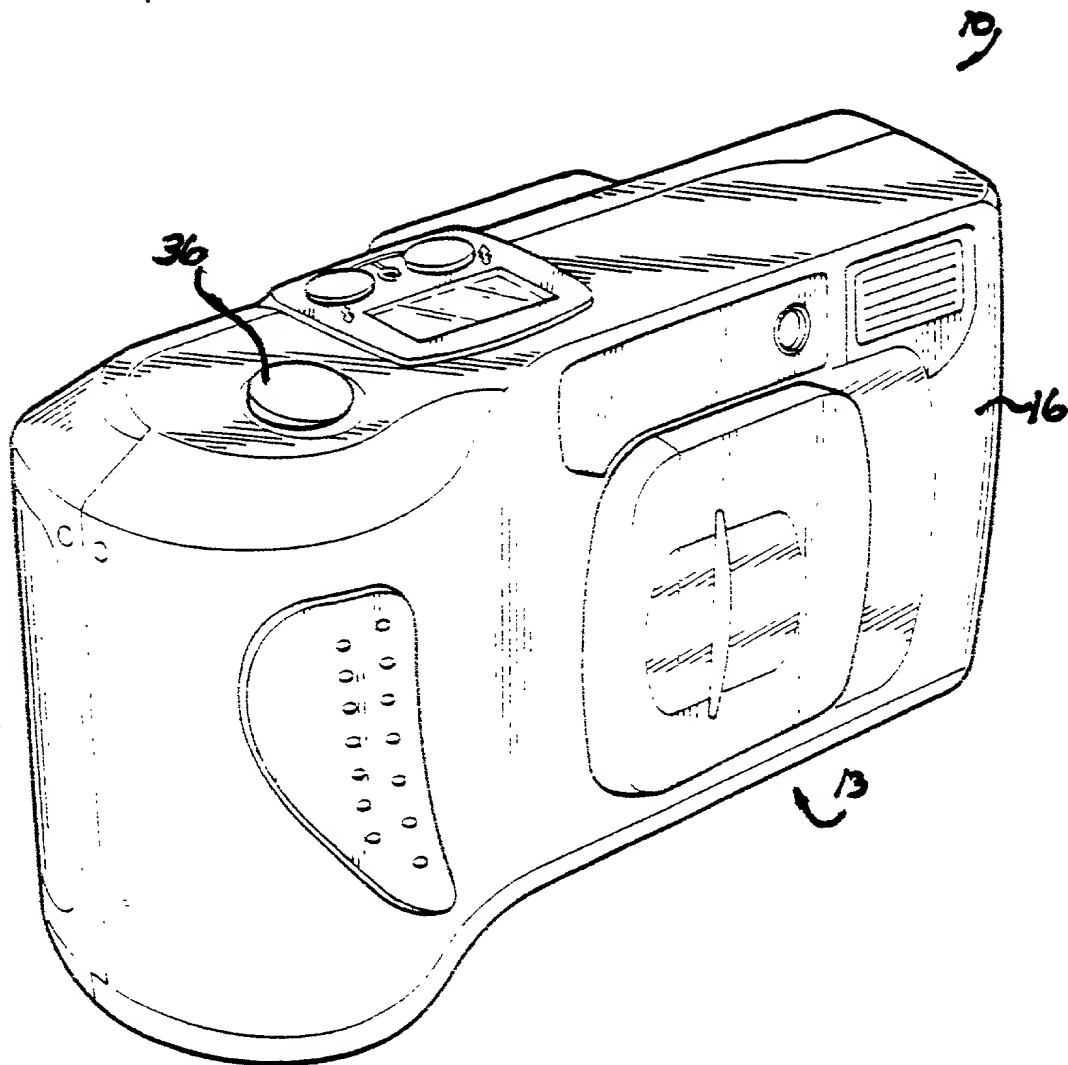


FIG. 3




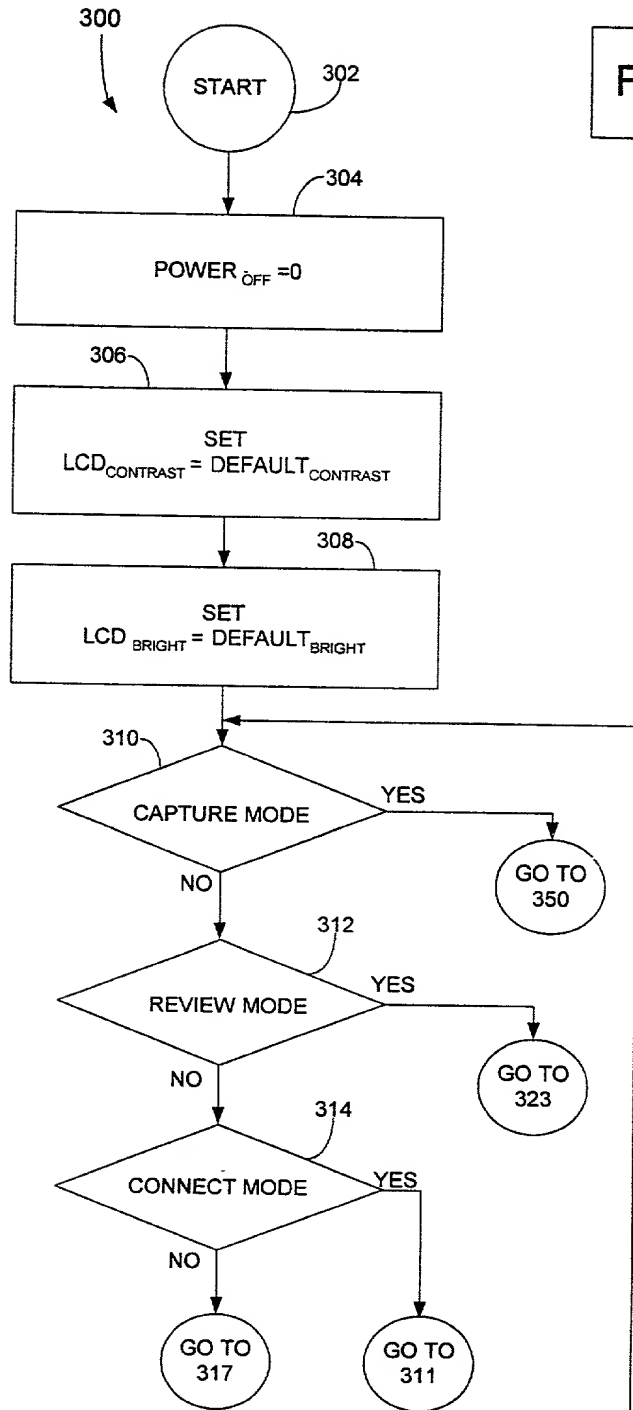


FIG. 3A

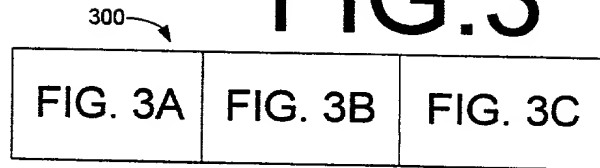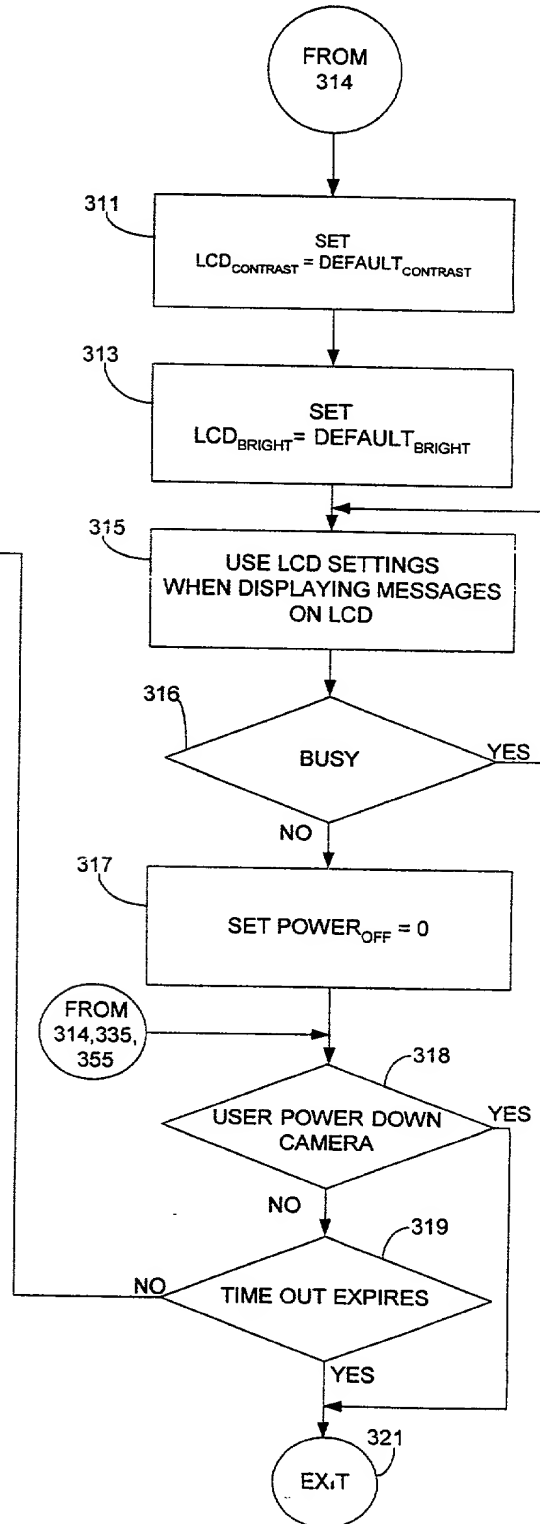

4/6

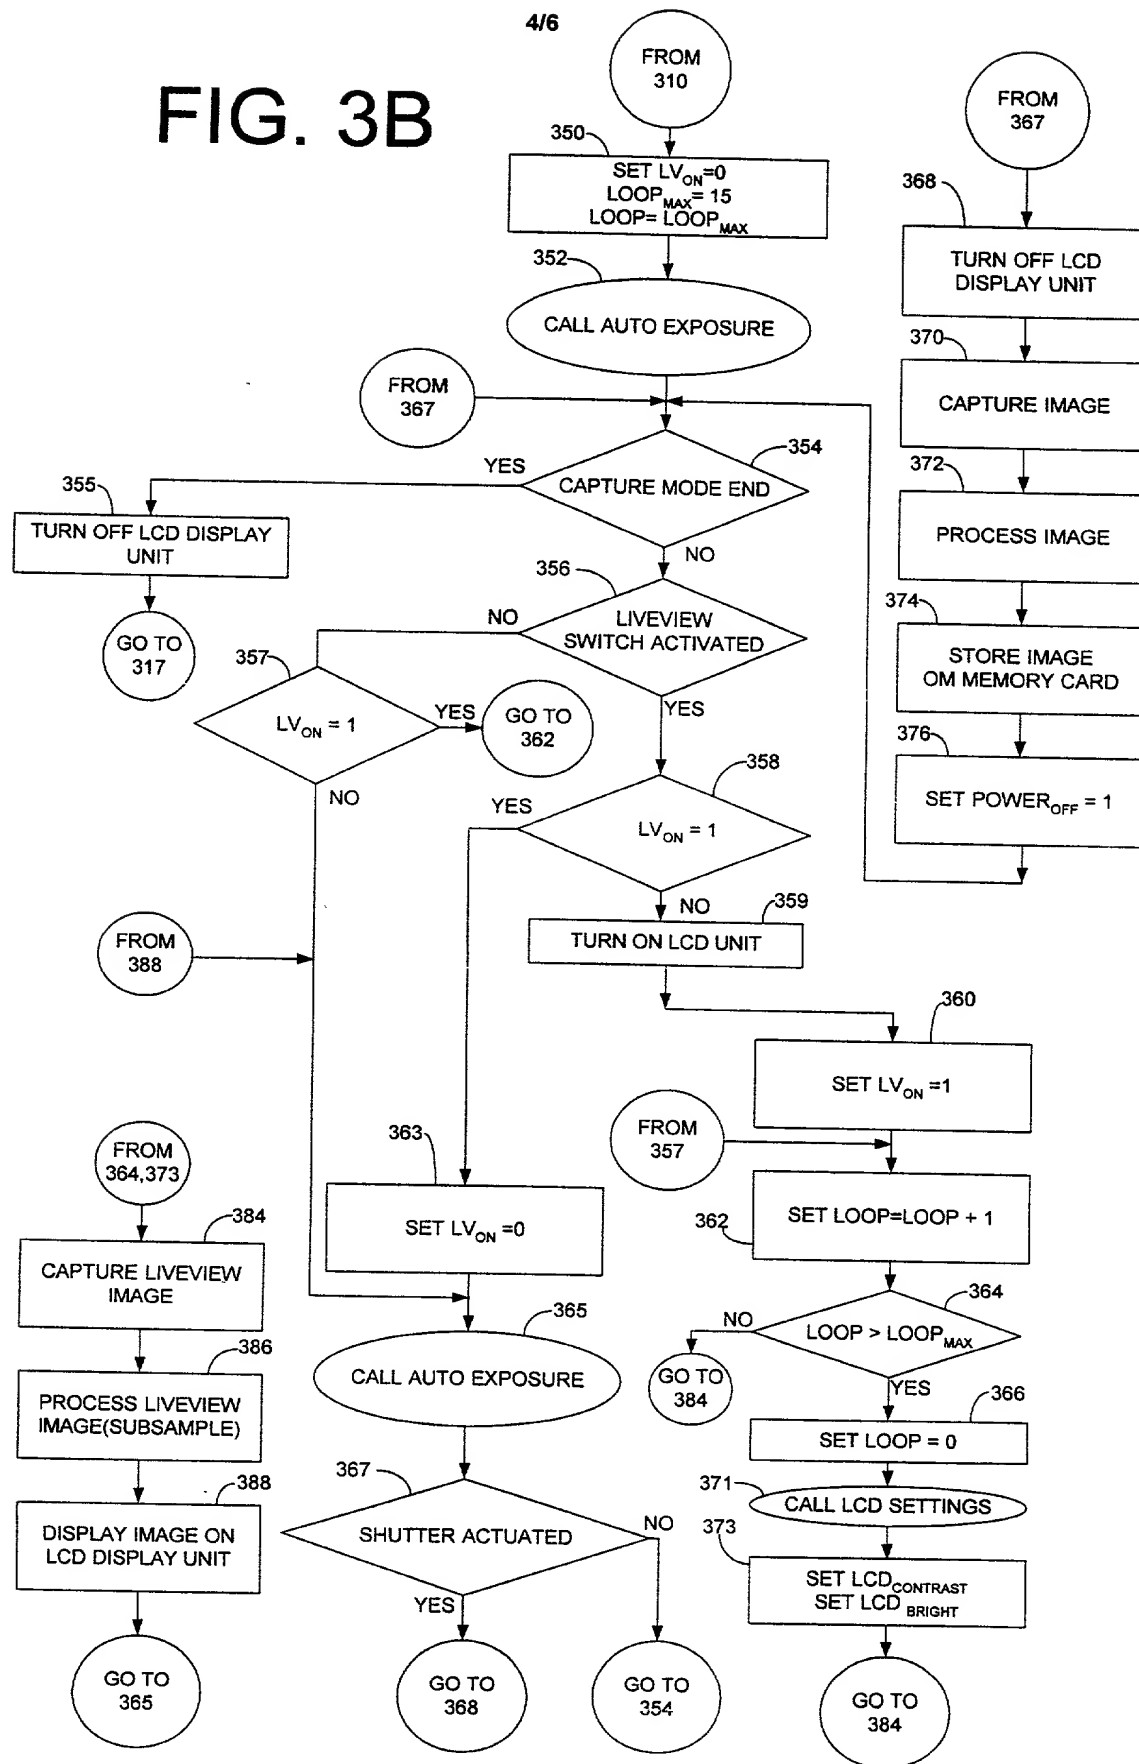

5/6


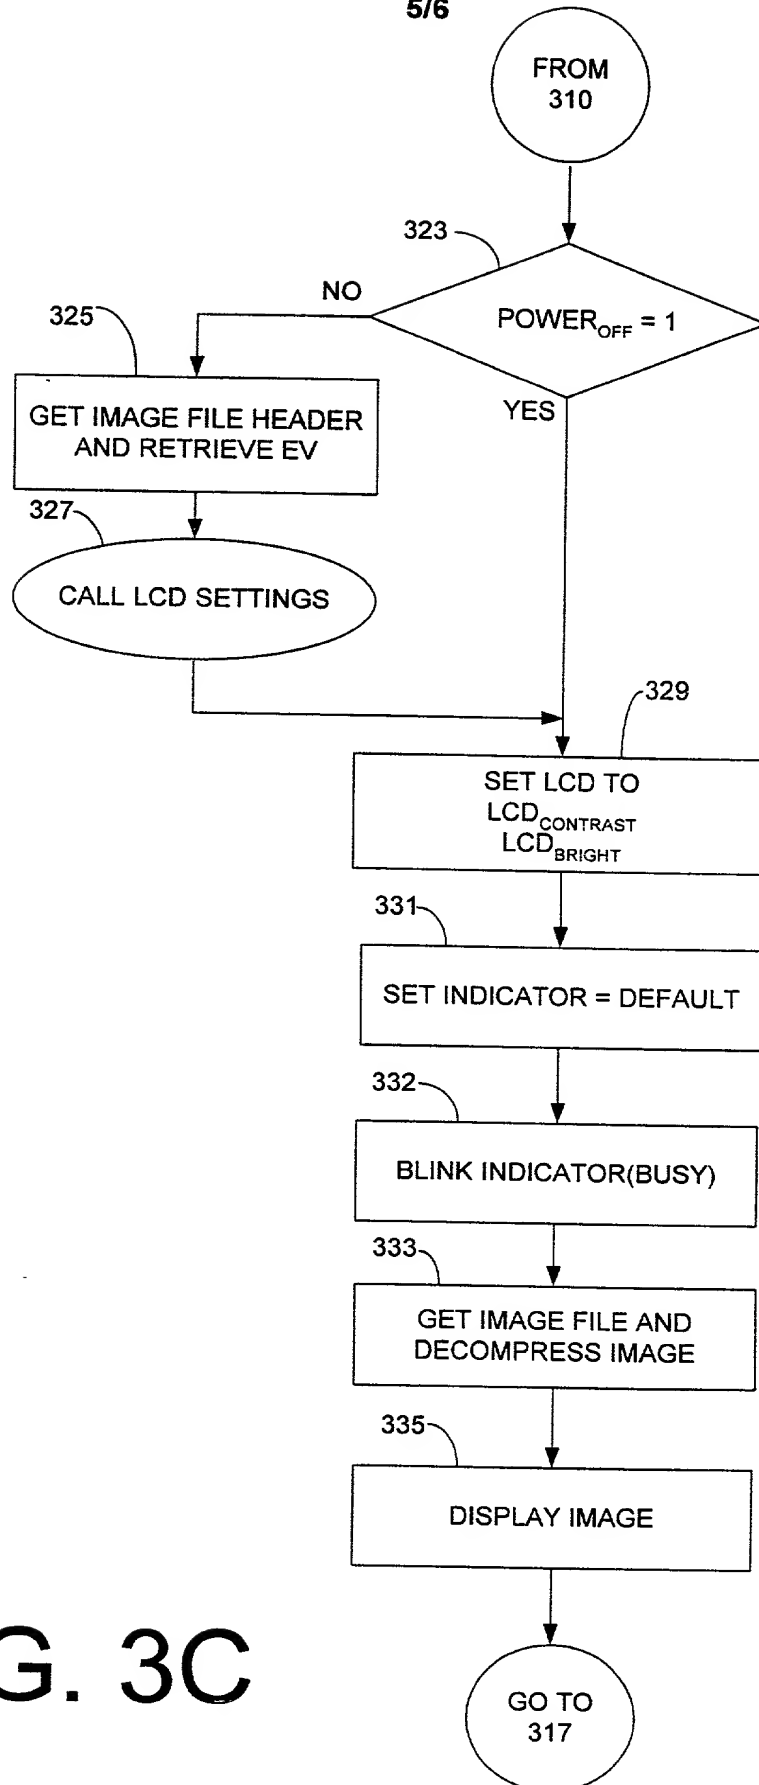


FIG. 3C

FIG. 4

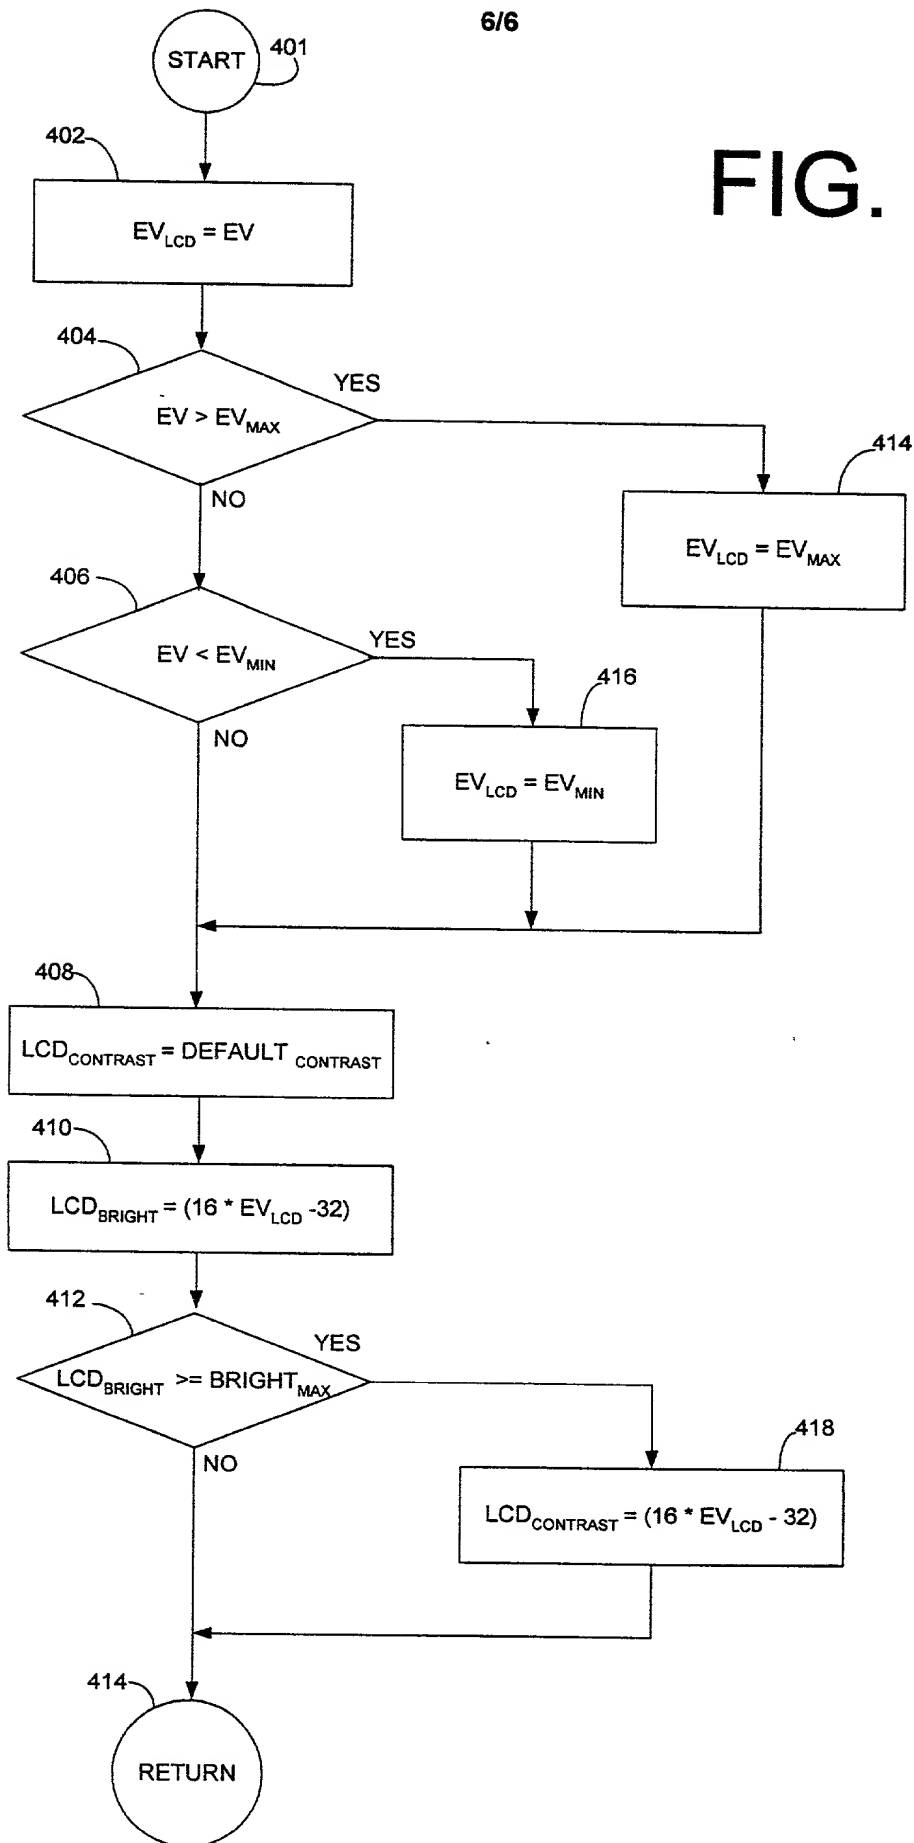

DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATIONATTORNEY DOCKET NO. 10002064-1

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

ILLUMINATED DISPLAY AND METHOD OF USING SAME

the specification of which is attached hereto unless the following box is checked:

() was filed on _____ as US Application Serial No. or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119
			YES _____ NO _____
			YES _____ NO _____

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE

U. S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (patented/pending/abandoned)

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Customer Number 022879Place Customer
Number Bar Code
Label hereSend Correspondence to:
HEWLETT-PACKARD COMPANY
Intellectual Property Administration
P.O. Box 272400
Fort Collins, Colorado 80527-2400

Direct Telephone Calls To:

Rick de la Torre
(858) 655-4560

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: Charles E. SchinnerCitizenship: USAResidence: San Diego, California 92120Post Office Address: 5551 Brunswick Avenue

Inventor's Signature

Date

10/31/00